



6 Gas, Sample Draw With PID, IR & Super Toxic Sensors

Gas Detection For Life

GX-6000



Features


- 6 Operating modes
- Smallest 6 gas sample draw
- 2 Interchangeable smart sensor slots
- 2 PID options: 10.6 & 10.0 eV lamps
 - Easily switch target VOC from customizable user list or a recently used list
- Benzene specific version
- PPM Leak Check mode
- LEL sensor protection mode
- Man-down alarm
- Panic alarm
- Auto display rotation
- Peak-bar display
- LED Light source
- Internal sample pump
- Light weight, small, rugged IP-67 design
- Interchangeable battery packs (Li-ion / alkaline)
- Operates up to 14 hours on Li-ion battery pack, fully recharges in 3 hours; 8 hours operation with alkaline pack
- Field replaceable sensors, batteries, filters and pump
- Intrinsically safe ATEX / IECEx / cCSAus

Applications

- Confined space entry
- Hazmat response teams
- Arson investigation
- Remediation sites
- Perimeter monitoring
- Leak detection
- Landfill monitoring
- Wing tank entry

Simply put, the GX-6000 is a game changer. This powerful hand-held instrument is capable of simultaneously monitoring up to 6 gases. In addition to the standard 4 confined space gases which include combustibles, O₂, CO, & H₂S, the GX-6000 has 2 additional smart channels that accept PID, IR or super toxic sensors. Equipped with a strong internal sample pump, a man-down alarm, a panic alarm, an LED flashlight, and large auto rotating LCD display, the GX-6000 can operate as a single gas PID unit or a multifunctional tool utilizing all 6 channels. The GX-6000 with a PID sensor will come equipped with a library of over 600 VOC gases to choose from as standard. Choosing from the library is easy with a personalized favorites list of 30 commonly used VOC's as well as a list of 8 of the most recently used VOC's. A benzene-specific version is available using a pre-filter tube for detecting low levels of benzene.

The GX-6000 has a rugged design built for the nastiest environments. It is equipped with a removable impact-resistant rubber boot and a dust and water resistant enclosure with an IP-67 rating. With 5 bright LED lights on 3 sides of the instrument, alarms are easily seen from a variety of perspectives. With vibration and loud audible alarm, GX-6000 will easily alert users when needed.

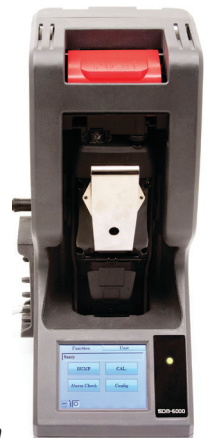

SDM-6000 Calibration Station

RKI Instruments, Inc. • 33248 Central Ave. Union City, CA 94587 • Phone (800) 754-5165 • (510) 441-5656 • Fax (510) 441-5650

World Leader In Gas Detection & Sensor Technology
www.rkiinstruments.com

Gases & Detectable Ranges					Common Specifications				
Gas	Measuring Range	Reading Increment	Alarm Set Points	Accuracy (which ever is greater)	Alarm Types	Gas alarm	Man-down	Trouble	
PID Sensors						± 5% of full scale	Low and high adjustable	1st - self reset 2nd - latching	Low flow Sensor connection Low battery Circuit error Calibration range
10.6 Lamp	600 VOC's	0 - 50,000 ppb	1 ppb: (< 5000 ppb) 10 ppb: (> 5,000 ppb)	A1: 5,000 ppb A2: 10,000 ppb					
		0 - 6,000 ppm	0.1 ppm: (< 600 ppm) 1 ppm: (> 600 ppm)	A1: 400 ppm A2: 1,000 ppm					
10.0 Lamp	Benzene Specific	0.1 - 50 ppm	0.01 ppm (0 ~ 10 ppm) 0.1 ppm (10 ~ 50 ppm)	No Alarms					
	300 VOC's	0 - 100 ppm	0.01 ppm (0 ~ 10 ppm) 0.1 ppm (10 ~ 100 ppm)	A1: 5 ppm A2: 10 ppm	Sample Method	Sample draw pump, flow rate 0.45 LPM, 50 foot sample range			
Galvanic						Display	Digital LCD, autobacklight, peak bar display, auto display rotation, and customize order of gases		
Oxygen (O2)	0 - 40.0% Vol.	0.1% Vol.	A1: 19.5 Vol. A2: 23.5 Vol.	± 0.5% O2	Audible Alarm	95 dB at 1 ft.			
Electro Chemical						Languages	English, Spanish, French, German, Italian, Japanese, Korean, Portuguese, Russian		
Carbon Monoxide (CO)	0 - 500 ppm	1 ppm	A1: 25 ppm A2: 50 ppm TWA 25 ppm STEL 200 ppm	± 5% of reading or ± 5 ppm	Continuous Operation	14 hours on Lithium-ion battery pack. Complete recharge in 3 hours. 8 hours Alkaline battery pack (3 AA size within each pack)			
Hydrogen Sulfide (H2S)	0 - 100.0 ppm	0.5 ppm	A1: 5.0 ppm A2: 30.0 ppm TWA 1.0 ppm STEL 5.0 ppm	± 5% of reading or ± 2 ppm	Operating Temp. & Humidity	-4°F to 122°F (-20°C ~ +50°C), 0- 95% RH non condensing			
Toxics (EC Sensors)						Dimensions	2.6" W x 7.8" H x 2" D (H200 x W68 x D52 mm) 14 ounce (400g) (with lithium battery pack)		
Ammonia (NH3)	0 - 400.0 ppm	0.5 ppm	A1: 25 ppm A2: 50 ppm	± 10% of reading or ± 5% of full scale	Case Material	Dust and water resistant with IP-67 approval (exclude sample hose and probe)			
Chlorine (Cl2)	0 - 10.00 ppm	0.05 ppm	A1: 0.5 ppm A2: 1.0 ppm		Safety Design / Approvals	Explosion proof: IECEx , ATEX , TIIS , cCSAus Explosion class :Ex ia IIC T4 Ga Others: CE Marking			
Hydrogen Cyanide (HCN)	0 - 15.0 ppm	0.1 ppm	A1: 5 ppm A2: 10 ppm		Standard Features	2 Smart sensors slots auto recognize sensor changes Library of over 600 VOC's User defined VOC list. Up to 30 frequently used Recent VOC list for last 8 selected gases Pump and circuit status indicators User & station ID selection menu Datalogging (interval, alarm trend, station and user ID) Snap logging - on demand data logging Demand zero / Auto zero BUMP and CAL expiration alarm Flashlight IrDA communication LEL sensor protection mode			
Nitrogen Dioxide (NO2)	0 - 20.00 ppm	0.05 ppm	A1: 3 ppm A2: 6 ppm		Standard Accessories	<ul style="list-style-type: none"> • Rubber boot • Hand strap • Probe with hydrophobic & dust filter 3' teflon lined hose • Benzene pre-filter tubes and holder (benzene versions) 			
Sulfur Dioxide (SO2)	0 - 99.90 ppm		A1: 2 ppm A2: 5 ppm		Optional Accessories	<ul style="list-style-type: none"> • SDM-6000 calibration station • Bundles with instrument carrying case and accessories • Flexible probes • Up to 50 foot sample hoses • Filter set • IrDA cable 			
IR Sensors						Warranty	Two years material (including sensors) and workmanship. One year for PID sensor		
Carbon Dioxide (CO2)	0 - 10,000 ppm	20 ppm	A1: 5,000 ppm TWA 5,000 ppm	± 5% of reading or ± 2% of full scale					
	0 - 10.00% Vol.	0.02%	A1: 0.50% Vol A2: 3.00% Vol STEL 3.00% Vol TWA 0.50% Vol						
Methane (CH4)	0 - 100% LEL 0 - 100% Vol.	1% LEL/ 0.5% Vol	A1: 10% LEL A2: 50% LEL						
Hydrocarbons	0 - 100% LEL 0 - 30% Vol.								
Catalytic									
Hydrocarbons (CH4, std)	0 - 100% LEL	1% LEL	A1: 10%LEL A2: 50%LEL	± 5% of reading or ± 2% LEL					



INSTRUMENTS

Toll Free: (800) 754-5165 • Phone: (510) 441-5656
Fax: (510) 441-5650 • www.rkiinstruments.com

Authorized Distributor: